

// CLASSIC-COLLECTION

TYPE SHT CLASSICS

— THE
SHADE STRUCTURE
—



FRAME

COLOUR

- All RAL-Colours galvanized / powder coated
- Ropes & components galvanized
- Steel construction
- Not foldable
- Applicable for snowload up to 75 kg / m² (DIN1055)
- Windsafe up to 120 km/h

COVER

MDT-TEX 680

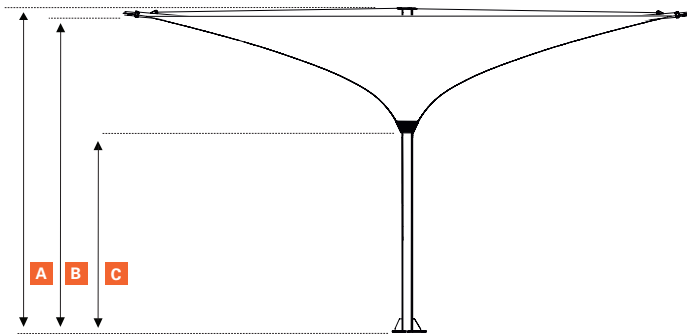
- PVC-coated Polyester fabric, min. 600 g/m², Fire protection B1, flame retardant DIN4102

more on request

ANCHORINGS

- Footplate welded to the mast
- Anchor on foundation
- foundation site





// DIMENSIONS & MEASURES



- DRAINAGE THROUGH THE MIDDLE MAST
- CONNECTED TO THE SEWER PIPE ARCH IN FOUNDATION (BY THE CUSTOMER)





DIMENSIONS ARE IN METERS

*all measurements are rounded

	 3x3	 4x4	 4,5x4,5	 5x5
MASS				
Umbrella without packaging (kg)	259	210	277	250
Frame (kg)	250	198	262	232
Cover (kg)	9	12	15	18

OPENED UMBRELLA TULIP

A Opened height (cm)	404	325	340	340
B Distance from cover to ground (cm)	335	320	317	320
C Distance from hopper to ground (cm)	203	198	198	198

	 Ø3	 Ø4	 Ø5	 Ø6
MASS				
Umbrella without packaging (kg)	235	308	329	421
Frame (kg)	230	298	314	400
Cover (kg)	5	10	15	21

OPENED UMBRELLA PAGODE

A Opened height (cm)	404	347	352	362
B Distance from cover to ground (cm)	335	326	331	337
C Distance from ground to steel cables (cm)	203	204	204	204

Supplied on pallet

all dimensions + weights given are approximate